

Zeta Plus™ MH Series

Dual Zone Depth Filter Cartridges & Capsules

Zeta Plus MH Series are a family of advanced, dual zone depth filters designed to provide optimal clarification and prefiltration in Food & Beverage applications. The patented* Zeta Plus filter design consists of two distinct layers, or “zones” of filter media with the upstream zone more open than the downstream zone. This structure enhances the contaminant holding capacity of the filter media, since larger particles are trapped in the upper zone of the filter media and smaller particles are trapped in the lower zone, reducing premature plugging and extending service life. The two filter zones can be independently selected and combined to optimize performance.

Superior Particle Removal

Zeta Plus MH filter medium offers unique advantages in contaminant removal by combining mechanical entrapment with electrokinetic adsorption. Larger particulate and hazes are mechanically entrapped in the depth of the media, while negatively charged particles, such as bacteria, yeast, and submicronic hazes, are adsorbed to the positively charged Zeta Plus filter media.

Features & Benefits

MH Series dual-zone filter media construction.

- Higher throughput, lower processing costs, smaller filter assemblies.
- Potential to condense two stages of filtration into one.

Wide range of upstream/downstream combinations.

- Customizable to meet product needs.

High tensile strength media.


- Withstands the rigors of hot water, steam, and chemicals for longer service life.

Full range of cartridge and capsule configurations.

- Scalable from laboratory to full production.

Totally enclosed system.

- Eliminates leakage and external contamination common with filter sheets.

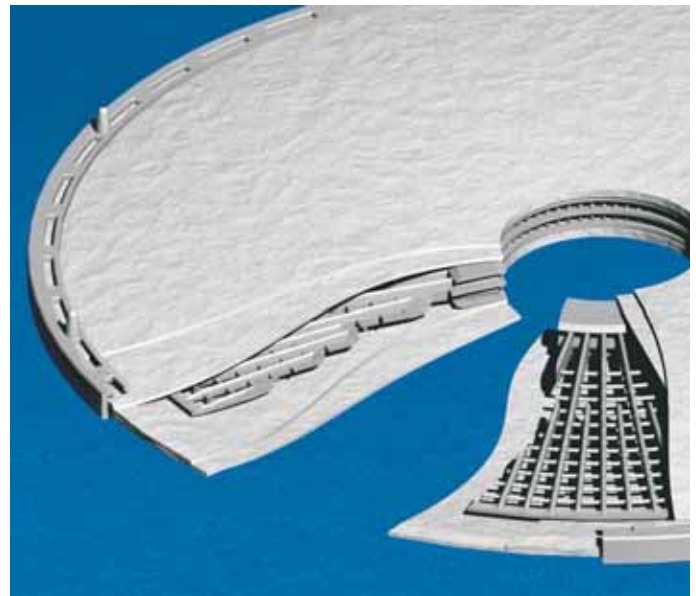

Applications

The Zeta Plus MH series is ideally suited for clarification and prefiltration in food and beverage, cosmetic, and general applications where the exceptional high wet-tensile strength media, combined with the innovative dual-zone design, provides extended service life. These include aqueous, alcoholic, proteinaceous, and acidic solutions.

Beer	Wine	Spirits	Syrups
Edible Oils	Flavor Concentrates	High Fructose Corn Syrup	Nutraceuticals

Product	Compatibility
Acetic Acid up to 20%	Satisfactory
Ethanol up to 98%	Satisfactory
Hypochlorite	Not recommended
Hydrogen Peroxide*	Satisfactory
Nitric Acid	Not recommended
Peracetic Acid*	Satisfactory
Sodium Hydroxide 2%	Not recommended
Sugar solution 10%	Satisfactory
Water up to 90°C	Satisfactory

*As found in commonly used sanitizing agents. Contact your local CUNO representative for advice on maximum recommended concentration.

Flow vs. Differential Pressure


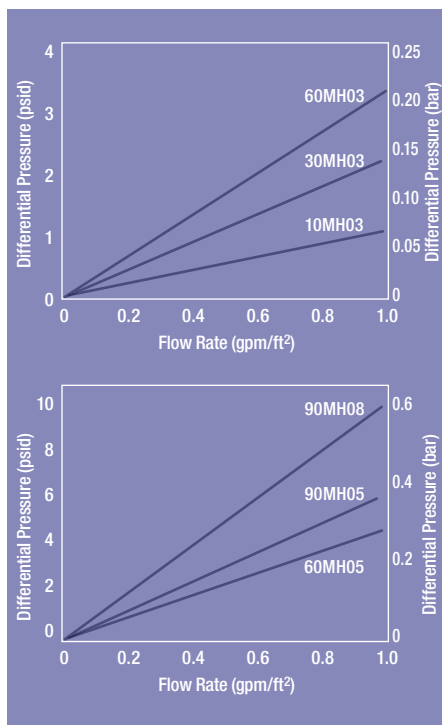


Figure 4: Nominal Retention Ratings

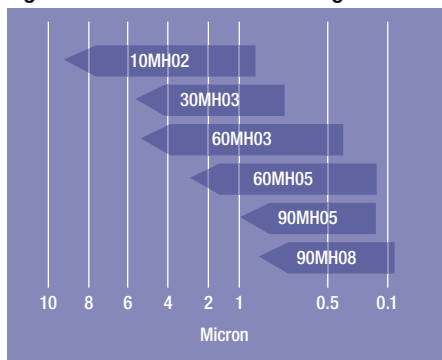

Chemical Compatibility

Compatibility with various chemicals is indicated in the table at left. It is recommended that Zeta Plus™ media be tested in the product under standard process conditions to confirm compatibility prior to use. All tests have been carried out at ambient temperature (20°C) unless otherwise indicated.

Cartridge Construction

Zeta Plus MH Series cartridges are designed for use with CUNO Zeta Plus sanitary style stainless steel filter housings. Cartridges are constructed from individual cells of Zeta Plus MH Series filter medium assembled together with polypropylene separators under predetermined compression and unitized by three, 316 stainless steel bands. Each cell is constructed using polypropylene molded edge seals and separators for high performance. Various gasket materials are available depending upon the application. Filter cartridges are available in 8, 12, and 16-inch diameters, with surface area ranging from 0.7 ft² to 42.2 ft² per cartridge. All components are listed in 21CFR as safe for food contact.

Flow Rates

The graphs below display flow rates obtained with 20°C clean water. Optimum flow rates vary by application, but in general, the flow rate per unit area (flux) should not exceed 0.25 gpm/ft² (10 lpm/m²) of filter media in beer and 0.5 gpm/ft² (20 lpm/m²) in wine or similar beverage for best performance. Lower flux rates often result in longer service life, greater throughputs and superior system economics.

Grade Selection


Zeta Plus MH Series filter media are available in nine standard grade combinations. The chart below is provided as a guide to correct grade selection based on nominal retention ratings and can be used in conjunction with the recommendations in Table 1 to determine the appropriate filter grade for your application. Operating conditions and the fluid being filtered impact retention performance. Small-scale pilot runs with Zeta Plus BC capsule filters can be performed to confirm grade selection prior to scale-up. CUNO's Scientific Applications Support Services (SASS) staff can assist in grade selection as well as assist with on-site evaluations. Filter system optimization can also be conducted at CUNO's laboratory facilities.

Table 3 references the nominal effective filtration area of Zeta Plus MH Series capsules and cartridges. For scale-up evaluations, it is strongly recommended that customers contact CUNO Scientific Application Support Services (SASS) for assistance.

Table 1: Application Recommendations

Application	Recommended Grades
Rough clarification (particles, haze)	10MH01, 10MH02
Rough clarification (yeast, haze)	30MH02, 30MH03
Polishing clarification/membrane prefiltration (yeast, haze, bacteria)	60MH03, 60MH05
Bioburden removal (haze, bacteria)	70MH05, 90MH05, 90MH08

Table 1 is intended as a guide. Grade selection and performance should be confirmed with small-scale pilot trials.

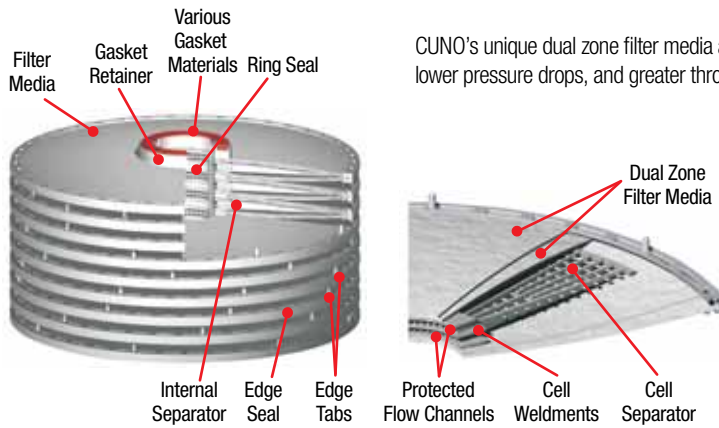

CUNO's unique dual zone filter media and cell separator ensure fast flow rates, lower pressure drops, and greater throughputs.

Table 2: Recommended Operating Parameters

Maximum Temperature	176°F (80°C)
Hot Water Sanitization	194°F (90°C)
Change-out Differential Pressure	35 psid (2.4 bar)
Recommended Flow Rate*	0.25 - 0.5 gpm/ft. ² (10 - 20 lpm/m ²)
Maximum Flow Rate	1.0 gpm/ft. ² (40 lpm/m ²)
Rinse Volume	1.25 gallons/ft. ² (50 liters/m ²)

*Consult CUNO for the best flow rate for your application.

Table 3: Nominal Effective Filtration Area

Cartridge Configuration	Surface Area
BC0030A (Single Filter)	3.7 in. ² (24 cm ²)
BC1000A (Single Filter)	0.7 ft. ² (650 cm ²)
BC2000A (Single Filter)	1.4 ft. ² (1300 cm ²)
45109 (8" diameter, 8 cell)	2.8 ft. ² (0.26 m ²)
45167 (8" diameter, 7 cell O-ring plug-in)	2.5 ft. ² (0.23 m ²)
45244 (12" diameter, 9-cell)	9.2 ft. ² (0.90 m ²)
45237 (12" diameter, 12-cell)	12.3 ft. ² (1.1 m ²)
45245 (12" diameter, 16-cell)	16.4 ft. ² (1.5 m ²)
Z16P (16" diameter, 14-cell)	34.7 ft. ² (3.2 m ²)
Z16H (16" diameter, 16/17 cell) see ** page 4	39.7/42.2 ft. ² (3.7/3.9 m ²)

Sanitary Filter Housings

CUNO provides a wide array of standard and custom designed sanitary filter housings to accommodate Zeta Plus MH Series filter cartridges. All housings are designed with the food and beverage industries in mind and feature 316L mirror-polished surfaces and easy-to-clean components, along with accessories such as CIP spray-balls and the innovative Zeta Plus Lifting Device. Custom design skid systems incorporating Zeta Plus and membrane cartridge filter housings, together with process piping, flow control and complete validation documentation (IQ, OQ), are also available.



Zeta Plus BC capsule filters are ideal for pilot scale and low volume applications.

Zeta Plus™ MH Series Ordering Guide

BC Capsules

Catalog Number	Grade
BC0025L (Luer)	10MH01 60MH05
BC0025S (Sanitary)	10MH02 70MH05
BC1000A (Single Filter)	30MH02 90MH05
BC1000B (3 Filter Pak)	30MH03 90MH08
BC2000A (Single Filter)	60MH03
BC2000B (3 Filter Pak)	

8" Diameter Cartridges

Catalog Number	Gasket Material	Grade
45109 (8" 8-cell)	11 - Nitrile 13 - Fluorocarbon 14 - EPR 22 - Silicone 23 - PTFE	10MH01 10MH02 30MH02 30MH03 60MH03 60MH05 70MH05 90MH05 90MH08
45167 (8" 7-cell, O-ring plug-in)	01 - Nitrile 02 - EPR 03 - Fluorocarbon 04 - Silicone 09 - PTFE Encapsulated Fluorocarbon	10MH01 10MH02 30MH02 30MH03 60MH03 60MH05 70MH05 90MH05 90MH08

12" Diameter Cartridges

Catalog Number	Geometric Variation	Gasket Material	Grade
45237 (12" 12-cell) 45244 (12" 9-cell) 45245 (12" 16-cell)	01 - Standard polypropylene	A - Silicone B - Fluorocarbon C - EPR D - Nitrile E - PTFE	10MH01 10MH02 30MH02 30MH03 60MH03 60MH05 70MH05 90MH05 90MH08

16" Diameter Cartridges

Catalog Number	Gasket Material	Grade	Opt. Lifting Handle*
Z16P (16" 14-cell)	A - Silicone B - Fluorocarbon C - EPR D - Nitrile E - Teflon	10MH01 10MH02 30MH02 30MH03 60MH03 60MH05 70MH05 90MH05 90MH08	H
Z16H** (16" 16/17-cell)			

*Omit "H" from part number if lifting handle is not required.

**Z16H design contains 17 cells for 90MH08, 90MH05, 70MH05, and 60MH05, and 16 cells for 60MH03, 30MH03 and 30MH02. 10MH02 and 10MH01 are available only in 14 cell configuration.

Important Notice

CUNO MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Since a variety of factors can affect the use and performance of a CUNO product in a particular application, some of which are uniquely within the user's knowledge and control, user is responsible for determining whether or not the CUNO product is fit for a particular purpose and suitable for user's method of application.

Limitation of Remedies and Liability

If the CUNO product is proved to be defective, THE EXCLUSIVE REMEDY, AT CUNO'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OR TO REPAIR OR REPLACE THE DEFECTIVE PRODUCT. CUNO shall not otherwise be liable for loss or damages, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including, but not limited to, contract, negligence, warranty or strict liability.

Warranty

Seller warrants its equipment against defects in workmanship and material for a period of 12 months from date of shipment from the factory under normal use and service and otherwise when such equipment is used in accordance with instructions furnished by Seller and for purposes disclosed in writing at the time of purchase, if any. Any unauthorized alteration or modification of the equipment by Buyer will void this warranty. Seller's liability under this warranty shall be limited to the replacement or repair, F.O.B., point of manufacture, of any defective equipment or part which, having been returned to the factory, transportation charges prepaid, has been inspected and determined by Seller to be defective. THIS WARRANTY IS IN LIEU OF ANY OTHER WARRANTY, EITHER EXPRESSED OR IMPLIED, AS TO DESCRIPTION, QUALITY, MERCHANTABILITY, FITNESS FOR ANY PARTICULAR PURPOSE OR USE, OR ANY OTHER MATTER. Under no circumstances shall Seller be liable to Buyer or any third party for any loss of profits or other direct or indirect costs, expenses, losses or consequential damages arising out of or as a result of any defects in or failure of its products or any part or parts thereof or arising out of or as a result of parts or components incorporated in Seller's equipment but not supplied by the Seller.



a 3M company

Your Local CUNO Distributor:

CUNO Incorporated

400 Research Parkway
Meriden, CT 06450
U.S.A.
(800) 243-6894
(203) 237-5541
Fax (203) 630-4530
www.CUNO.com

CUNO and Zeta Plus are trademarks of 3M used under license.

© 2008 3M Company. All rights reserved.
70-0201-8865-5
LITZPMH.0608